

WELDING FUME

Dangerous welding fumes come from the metal being welded, from paint or other coating on the metal, or from the filler material used to make the weld.

Short-term health problems from breathing welding fume include:

- **irritated eyes, nose, throat, and lungs.**
- **loss of appetite, vomiting, cramps, and nausea.**
- **metal fume fever.** For more information about metal fume fever, see ‘Lead and other toxic metals’ on page xx.

Long-term health problems from breathing welding fume include:

- **bronchitis, asthma, emphysema,** and other lung diseases.
- **cancer.**

Welding should never be done near solvents or degreasing equipment. Heat and sparks from welding can cause flammable solvents and solvent vapors in the air to catch fire. Heat from welding can also burn solvent vapors in the air, creating deadly phosgene gas.


Plastic fumes

There are many kinds of plastic made with different mixes of chemicals. The health problems caused by breathing plastic fume depend on the chemicals in the fume. For example, polyurethane is a plastic commonly used to make foam seat cushions, spray foam insulation, foam packaging material, molded plastic parts, cores for die casting metal parts, and spray paints. Polyurethane is made of chemicals called **isocyanates**. Workers who breathe fume from molding polyurethane are breathing dangerous isocyanates.

Breathing fumes from melted and hot plastic, or from overheated plastic that breaks down, can also be very dangerous.

Dangers from breathing isocyanates and other plastic fumes include:


- **irritation of the eyes, nose, and throat.**
- **allergic skin rash.**
- **cough, wheeze, chest tightness and shortness of breath.**
- **severe irritation of the lungs** that can cause pneumonia and death.
- **severe asthma** that can stop breathing and cause death.
- **harm to kidneys and other organs.**
- **cancer.**

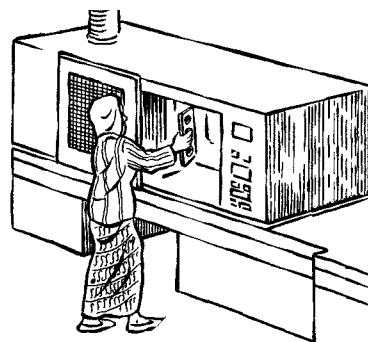

Removing molded plastic pieces from an injection molding machine

Why are there poisonous chemicals in factories?

In industrialized countries, more than 60,000 chemical products are used in homes, factories, vehicles, and all kinds of businesses. About 3,000 new chemical products are made each year. Most of these products have not been tested to find out if they cause health problems or harm the environment. Fewer chemicals are used in less industrialized countries, but workers in factories around the world use many untested and unregulated chemicals.

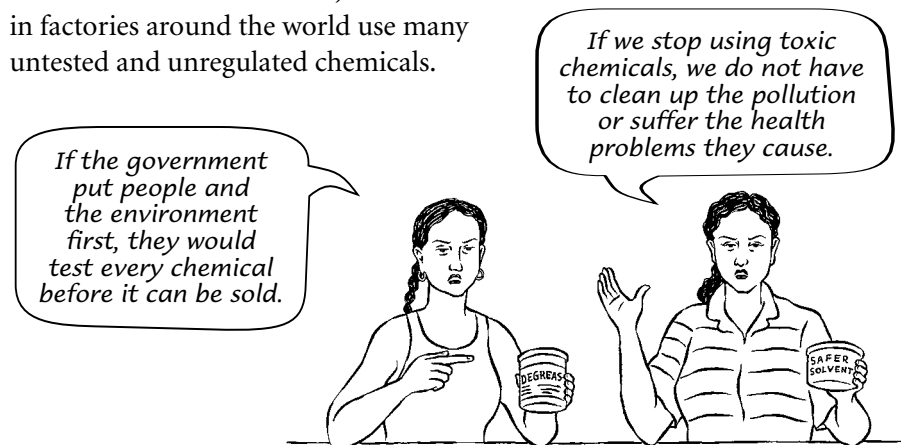

In most countries, a company can sell a new chemical without proving the chemical is safe. Some governments regulate the use of some chemicals known to cause health problems, but only **after** the chemical has made people sick.

Testing chemicals to learn how they harm people and the environment is slow and uncertain. Most tests are done on animals in a laboratory. Chemicals can affect people differently than they affect animals, so these tests do not always help us understand how chemicals can harm people. And tests are not done for all health effects. For example, very few chemicals have been tested to find out how they affect children conceived by men or women exposed to a chemical, or how they affect babies of pregnant women exposed to a chemical. Most workers are also exposed to combinations of chemicals, not to one chemical at a time. Only a few combinations of chemicals have been tested for their health effects on people.




What do you think?

Why do chemical companies make and sell so many dangerous products?

Why can employers make workers use chemicals with known health dangers?

Protection from chemicals

The most effective way to protect workers from dangerous chemicals is to get the boss to use fewer chemicals or less dangerous chemicals in the factory. If dangerous chemicals are used in the factory, then the boss is responsible for making sure workers are protected from exposure.

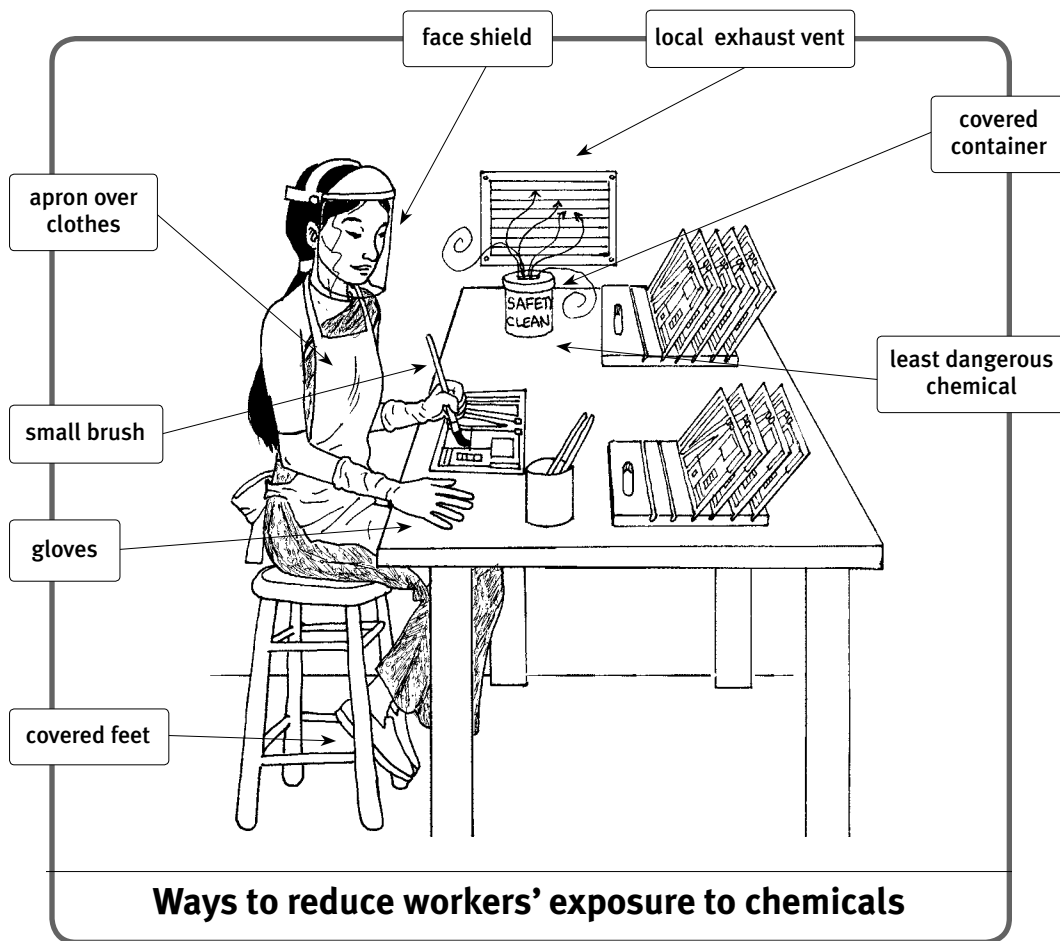

Informed workers are most safe

Workers cannot prevent exposures to dangerous chemicals if they do not know how dangerous a chemical is AND how to reduce exposure. For ideas about getting information on chemicals, see 'How can you tell which chemicals are dangerous' on page xx. Make sure managers and supervisors have the same information. Workers cannot follow safer chemical policies if supervisors do not let them.

Learn about the chemicals in your factory

The **work hazard map activity** on page xx can be a useful way to find out what workers know about chemicals used in the factory and the health problems that may be caused by chemicals. You can use the results of the activity to decide which chemical dangers workers want to reduce first. The solutions suggested on pages xx to xx in this chapter can help you decide how to reduce workers' exposure to chemicals.



How to reduce workers' exposure to dangerous chemicals

- Inform workers about chemicals they use.
- Ban the most dangerous chemicals from the factory.
- Use the safest chemicals.
- Use the smallest possible amount of a chemical.
- Keep chemicals out of the air and off of the body.
- Use ventilation, especially local exhaust vents.
- Prevent spills and leaks.
- Do not depend on face masks or protective clothing — reduce exposure first.

Content labels on all chemical containers

Every chemical container should have a content label on it, written in a language workers can read. The label should list the known health dangers of the product and include a warning if the chemical is flammable.

When a chemical is taken out of one container and put in another, the new container should also have a complete content label.

Never put chemicals in a container that is used for food or drinks, or that looks like a container for food or drinks. People expect a soft drink bottle to contain soft drink, not a dangerous chemical. Someone may drink from the bottle by mistake.

Never put food or drink in a container used for chemicals. Even if the container has been washed, it will have small amounts of chemicals inside that can get into the food or drink.

AXO DEGREASER	
contains: Methylene chloride. 80%	
Inert 20%	
DANGER!	
Splashes can irritate and burn the skin and eyes. Breathing irritates nose, throat, and lungs causing coughing, wheezing, shortness of breath. Breathing and skin absorption harm liver, kidneys, and brain, and causes cancer.	
Precautions during use: Use in well ventilated area. Avoid contact with eyes, skin, and clothing. If needed wear face shield or safety glasses. Do not smoke, eat, or drink where methylene chloride is handled. Wash hands with soap and water before eating, drinking, smoking, or using the toilet. Wash work clothes and skin after every work shift.	
First aid: Skin: Immediately wash any skin that may have contacted the chemical. Eye: Hold eye open and rinse with water for 15 minutes or longer. Call a doctor.	
Manufactured by: Axo Chemical Co., 111 Only Drive, Onlyville, Iowa, 11111 USA Phone 111-111-1111. CAS # 75-09-2	

Ban the most dangerous chemicals

Some chemicals are too dangerous to use in factories or anywhere else. Thanks to years of protest by workers, doctors, and health advocates, these chemicals and products are no longer used in some places:

- Asbestos
- Lead in pigments, dye, paint, and other coatings
- Toxic metals in many pigments, dye, paints, and other coatings
- Rosin or colophony flux for soldering
- Solvents such as glycol ethers, methylene chloride, benzene, and carbon tetrachloride
- Diesel, gasoline, and propane engines used indoors
- Sand for sand blasting


Companies now make safer products that replace some of the most dangerous chemicals. And safer processes have been developed in some industries, so these chemicals may also be banned in the future:

- Lead, chromium, cadmium, and mercury in electronics, including solder.
- Chlorinated and fluorinated (halogenated) hydrocarbon solvents.
- PVC plastic made from vinyl chloride.

Use fewer chemicals and less of them

Bosses often do not think about how to use less chemical in the factory. Workers can help bosses see where using less chemical is better for workers, is less wasteful, and more efficient. For example:

- **Cleaner, more efficient processes and techniques** can reduce the need to use chemicals for cleaning and degreasing.
- **Steam and detergent cleaning** can work as well better than a chemical cleaner or solvent.
- **Low solvent/high pigment paints and low solvent coatings** can coat the same amount of parts with less solvent. These coatings also dry faster.
- **Using a brush, roller, syringe, sponge, ladle, or other tool** allows a worker to apply the smallest amount of chemical to the smallest area. The worker uses less chemical with less waste and less mess to clean up.
- **Cleaning up excess chemical right away** protects other workers from exposure. For example, wiping off excess oil from machined parts keeps the oil from spreading to other surfaces that will later have to be cleaned.
- **Spot cleaning dirt or excess chemical** uses less cleaner or solvent than cleaning the whole piece.

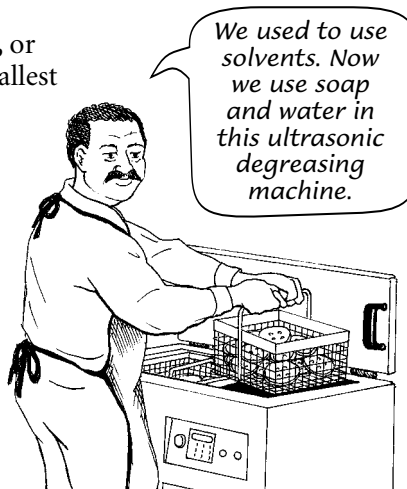


Find a safer chemical

The boss should buy the mildest, safest chemical products needed to get the job done. For example:

- **Electric motors** can be used for indoor vehicles instead of diesel, gasoline, or compressed gas .
- **Non-chlorinated hydrocarbon solvents** can often be used instead of chlorinated solvents like methylene chloride or TCE (trichloroethylene).
- **Water-based cleaners, glues, paints, dyes, and coatings** can often be used instead of products that contain a solvent.
- **Weaker strength acid and alkaline baths and washes** can work just as well as stronger ones.
- **Metalworking fluids made from vegetable oils**, like rapeseed or canola, may be less harmful than fluids made from mineral oils.
- **Small plastic or metal pellets** can be used instead of sand as a blasting material to eliminate silica dust.

Prevent chemicals from getting into the air

Some ways to keep chemicals out of the air are simple, and workers may be able to do them easily. For example, when you are not using the chemical in a container, cover the opening to keep vapors out of the air. Make the opening smaller to fit the tool you are using. Try to use a small tool that applies just the right amount of chemical. **The less chemical you use, the less vapor goes into the air you breathe.**

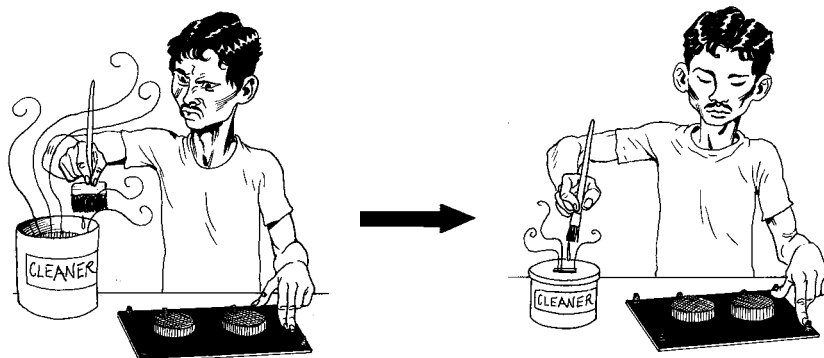

Breathing too much chemical vapor is dangerous.

Cover containers and use a small amount of the chemical.

PREVENT SPLASHING, DUST, AND MIST

When workers have the right tools and equipment, with time and training to use them properly, they can reduce splashing, dust, and mist in the air. But workers are often unable to prevent these problems when work areas are crowded and messy, machines are not maintained and repaired, and the boss pushes workers and machines to work as fast as possible.

Anti-foam agents can be added to chemical baths to keep mist from forming in the air above the bath. Putting plastic chips or balls on the surface of electroplating baths can also prevent mist from forming in the air above the bath.

MAINTAIN AND CLEAN METALWORKING FLUIDS

Dangerous bacteria can grow in metalworking fluids and cause lung problems for workers. You can prevent bacteria from growing by cleaning metalworking fluids regularly. You cannot see the bacteria in the fluid, but a trained worker can test the fluid for bacteria levels and acidity.


Keep the coolant system running on days when there is no work to keep the metalworking fluids circulating. Circulation puts air into the fluid that reduces bacteria growth. This also reduces the awful smells when the cooling system is restarted. This smell is a sign of bacteria growing in the fluid.

REDUCE SOLDERING AND WELDING HEAT

Fumes are less dangerous when soldering and welding are done at the lowest temperature needed to do the job.

Solder and flux make fume and smoke when soldering irons or wave soldering machines are too hot. If there is lead in the solder, the fume is very dangerous. Newer soldering irons and soldering machines have a temperature control that workers can set to prevent overheating the solder.

With proper training, welders can reduce fume by hand welding with lower heat and by controlling the heat in automated welding machines.

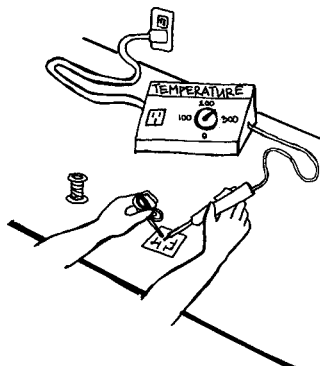

A maximum soldering heat of 200 to 250°C prevents lead fumes.

CLEAN METAL BEFORE CUTTING OR WELDING


If a metal being welded or cut has chemicals on it, such as oil, paint, or solvent residue, these chemicals can also turn into dangerous fumes. If the metal is clean, the welding and cutting fume will be a little less dangerous.

If you use a solvent to remove paint or other coatings on the metal, use soap and water to wash any dried solvent off the metal before welding.

CONTROL HEAT IN PLASTICS PROCESSING

Workers processing plastic can breathe fume from melted plastic and fume from plastic that breaks down after getting too hot or staying hot for too long. The fume from plastic breaking down is usually much more harmful than the fume from melted plastic.

Plastic processing machines melt the plastic and push or blow it into a mold that gives it a shape. To reduce the amount of fume, the plastic should be heated just enough to melt it and mold it. Plastic molding machines must be set up for each new batch of plastic and maintained carefully to control the heat and processing time.

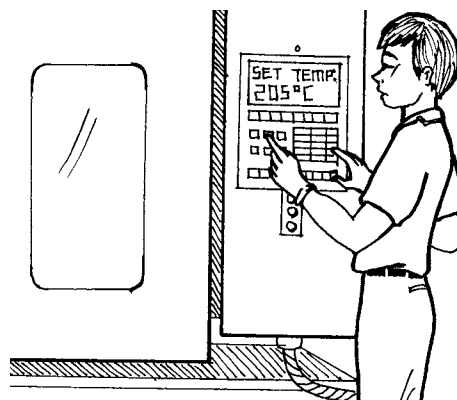

To keep plastic from getting too hot and creating dangerous fumes, workers need training and time to adjust and maintain the machine.

AVOID AEROSOLS OR SPRAYS

When you spray a chemical, most of it goes into the air or on other surfaces below or behind the part you aim the spray at. If you must use spray to paint or coat parts, use the least amount of spray that will cover the part. A spray booth will also help keep the chemical out of the air in other work areas. For an example of a spray booth, see page 97.



Spraying puts a lot of chemical into the air.



Use a brush or sponge to put the chemical only where it is needed.

Flammable chemicals should never be sprayed, because they can create explosive vapors in the air. A spark or flame can cause the vapors to catch fire.

Do not use flammable chemicals around sparks or hot processes, such as welding or soldering, or where flames are used to heat baths, ovens, or plastic molding machines.

**DO NOT USE ASBESTOS**


Asbestos is too dangerous to use in any factory. If you are working with asbestos, do everything possible to get the boss to replace it with a safer material.

To keep asbestos dust out of the air, all work with asbestos should be done inside a special box that holds the dust until the fibers are wet and mixed with other materials, or caught in a special filter.

For more information on working with asbestos, see the 'Resources' on pages xx to xx.

CONTROL HEAT AND COVER CHEMICAL BATHS

Putting covers on chemical baths when they are not being used keeps vapors from the bath out of the air. Less vapor is created when heated baths are kept from getting too hot and are allowed to cool when not in use.

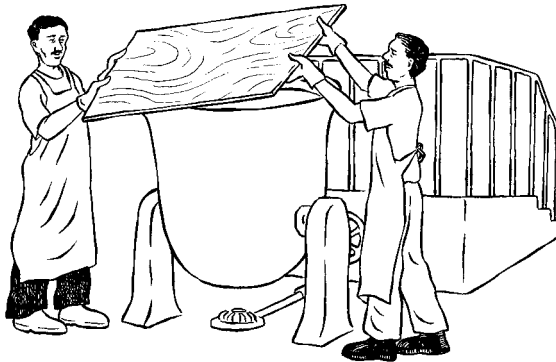


Covering a chemical bath you are not using keeps vapors out of the air.

ENCLOSE AND VENTILATE MACHINES AND PROCESSES

Large machines that produce a lot of chemical vapor, mist or fume, are safest when they are enclosed in a large, ventilated box. The box stays closed when the machine is working, and can be opened for loading, adjusting, maintenance, and repair. Exhaust ventilation on the machine blows vapor and fume outside the factory. Some boxes have a mist collector instead of an exhaust vent. The mist collector filters the air in the box before blowing it back inside the factory. **A mist collector is not as safe as an exhaust vent**, because it does not filter out all of the chemical.

Automated metalworking, welding, and soldering machines can be enclosed like this, as well as plastic processing machines, such as injection molding, blown film lines, pelletizer machines, and ovens for heating a product or burning out plastic molding equipment.

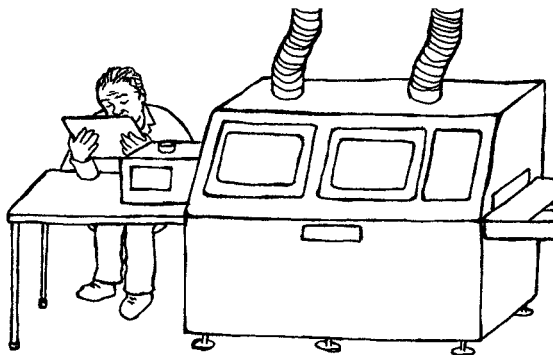

Enclosed and ventilated soldering machine

Ventilation helps reduce chemicals in the air

You may not be able to prevent some chemicals from getting into the air in the factory. But ventilation can help reduce the amount of chemicals workers breathe. Local exhaust vents remove chemical vapors before they get into the air inside the factory. Roof vents and exhaust fans help move air with dust and chemicals out of the factory building. For more information, see 'Ventilation' on pages 94 to 97.

Masks are not the best protection from chemicals

Keeping dangerous chemicals out of the factory is the best way to prevent health problems from breathing in chemical dust, vapor, fume, and mist. If you work with chemicals without good ventilation, a rubber mask with filters can give you some protection. Even with ventilation, welders and workers who handle asbestos need special masks.



A cloth or paper mask will NOT protect you from breathing in chemical vapors. The vapors pass through the paper or cloth.

PROBLEMS WITH RUBBER MASKS

Workers' heads and faces are different shapes and sizes. Before using a rubber mask, try it on to make sure it fits your face. If the mask fits snugly and is not too tight, test it to make sure chemical dust and vapors cannot get in around the edges. The mask will not protect you if you

- smell the chemical while wearing the mask.
- find dust or chemical residue inside the mask.
- feel the chemical's effects while wearing the mask.

Rubber masks do not fit well on faces with beards or whiskers. They are also hot and uncomfortable to wear, and make it difficult to talk with coworkers. It is more difficult to breathe while wearing a rubber mask, so using a mask is dangerous for workers who already have breathing problems or a heart problem.



Rubber masks that keep out chemical vapors require a specific filter for each chemical.


These masks are expensive, and the filters and other parts need to be cleaned and replaced often. To work properly, different filters must be used with different chemicals.

MASK FOR WELDING

Even if you are welding with good local exhaust ventilation, you will need the extra protection of a good mask to keep from breathing welding fume. For most types of welding you need a snug-fitting rubber mask with particulate filters that block out the fine dust in metal fume. You will need advice from someone who knows about chemicals and fumes from the type of welding in your factory to know which filter you need or if you need a supplied air system instead of a filter.

Another way to keep from breathing welding fume is to blow fresh air into a welder's hood through a hose. The air blowing out the bottom of the hood keeps welding fume from getting inside the hood. If the air blowing in is cool and dry, it can help keep the welder cooler while doing this hot work. If you weld stainless steel, you should have this kind of "supplied air" mask.

A welder's hood with fresh air blown in through a hose gives more protection from welding fume.

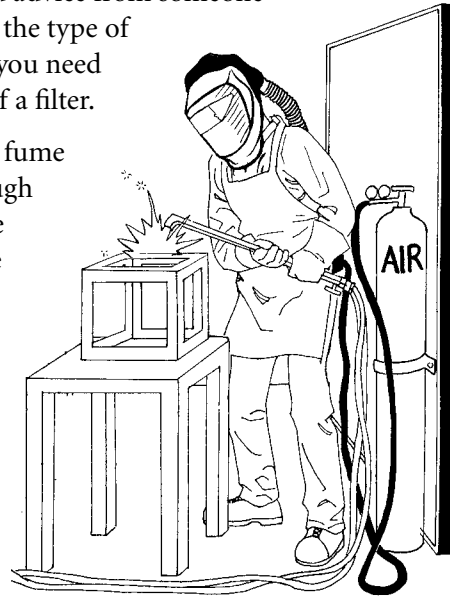

MASK FOR ASBESTOS

Even if you are working with wet asbestos that is enclosed with good exhaust ventilation, you will need the extra protection of a good mask. To filter out the tiny asbestos fibers, you need a snug-fitting rubber mask that has a HEPA-type filter.



What do you think?

Some workers are given protective clothing and masks, but do not use them. Why does this happen?

Which protections from breathing chemicals do you think are best for your job? Why?

Keep chemicals off workers' skin

The boss is responsible for providing, setting up, maintaining, and properly guarding tools and equipment to protect workers from leaking chemicals and splashes. Workers can often arrange work areas and job tasks to prevent chemicals from splashing, dripping, or leaking.

TOOLS FOR HANDLING CHEMICALS

You can avoid touching chemicals with your bare hands by using brushes, ladles, or long-handled tools to mix, measure, or apply chemicals. The boss should supply these tools, but workers can sometimes adapt an existing tool or make a tool to fit a specific job.

SPLASH GUARDS ON MACHINES

On some machines, attaching a simple splash guard can protect the worker from fluids coming out of the machine.

PROTECTIVE CLOTHES

Cloth or leather gloves and aprons, long sleeves, and covered legs and feet can keep dust, paste, powder, and other solid chemicals off your skin. These clothes can also protect you from very small splashes of liquid chemicals.

If you handle a lot of wet chemicals or products dripping with chemicals, you will need rubber boots, gloves, and a long apron that keep the liquids from soaking through your clothes. There are gloves, aprons, and boots made of different kinds of rubber for handling different chemicals. If the chemicals you work with go through one type of rubber, pressure the boss to buy protective clothing made of rubber that will protect you. Some people cannot wear gloves made of latex rubber, because latex can cause skin irritation.

If a chemical soaks into your clothes, remove the wet clothes and wash your skin right away. For more information, see 'Emergency eye wash and body shower' on page 88.



A FACE SHIELD OR GOGGLES

A clear face shield can protect a worker's mouth, eyes, and face from chemical splashes. This type of shield is easy to take on and off, and it is easy to clean. Goggles protect the eyes better, but they can also be hot and uncomfortable to wear. A welding hood or shield protects the welder's eyes, face, and neck from sparks and dangerous light.




A GOOD FIT IS BETTER PROTECTION

Protective clothes can be hot and uncomfortable to wear. Gloves, aprons, masks, or goggles can also be dangerous if they do not fit well. If they are too large or too loose, they may not protect you from chemicals at all. Poorly fitting gloves can make it difficult to handle tools or do precise work. Long, loose clothing can get caught in machinery or cause you to trip and fall. Masks or goggles that do not fit your head and face properly can make it difficult for you to see your work.

It is the boss's responsibility to provide protective clothing in several sizes, so each worker can choose items that fit properly.

CLEAN UP WORK AREAS REGULARLY

You can get chemicals on your skin from dust, soot, and mist on work surfaces, walls, and floors all over the factory. When a drop of chemical on a work table is not cleaned up right away, the chemical stays on the table and can get on the skin or clothes of any worker who touches it. Regular cleaning reduces the amount of chemical in the whole factory. Cleaning is especially important in factories where very toxic substances are used. For more information about cleaning up chemical dust, see 'Prevent dust from getting into the air' on page 100.

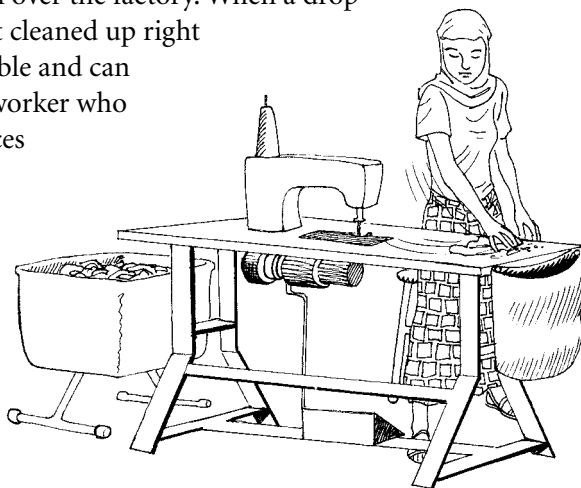

CLEAN UP EXCESS OIL

Workers often get machine oil on their hands, tools, clothes, and parts being worked on. Cleaning up the oil right away reduces workers' exposure to oil and prevents the use of dangerous solvents to remove the oil later.

Prevent spills and leaks

It is easier and safer to prevent chemical spills and leaks than to clean them up. You can prevent most chemical spills and leaks by:

- **transporting chemicals in closed containers that cannot break or shatter.** If you carry containers of liquids or powders on carts, use carts with sides and spill trays to catch leaks.
- **using small containers of chemicals in work areas.** Preventing and stopping leaks is easier when bulk chemicals and large containers are kept in a separate storage area.
- **transferring chemicals safely from one container to another,** using drip-preventing spouts for liquids, and proper scoops or other tools for solids, such as pastes, powders, and pellets. Use a tray under the containers to catch leaks and spills. **Static electricity can cause flammable solvents to explode.** To prevent this, some factories have static control mats around the area where flammable solvents are stored. When transferring solvents, you can also prevent an explosion by connecting a wire for earthing (grounding) to the solvent in each container.
- **controlling heat during plastic processing.** When melted plastic gets too hot, it can leak or overflow the machine.
- **inspecting and maintaining containers, pipes, pumps, valves and machines** that could leak chemicals, including safety shut-off valves or automatic shut-offs. If damage and worn parts are noticed early, they can be repaired or replaced before a leak happens.



Transferring a solvent to small containers.

Emergency body shower and eye wash

Every work area where chemicals are used should have an **emergency body shower** and an **emergency eye wash** station with enough clean water to flow continuously for at least 15 minutes.


**FIRST
AID**

FIRST AID FOR A SPLASH OR SPILL

Quick use of an eye wash or body shower can save workers from permanent damage to the eyes and skin from strong chemicals.


For chemicals on the skin:

Wash off immediately with lots of fresh water and continue washing for 15 minutes. If the chemical can cause burns or severe skin irritation, start showering before you take your clothes off.

For chemicals in the eyes:

Rinse both eyes immediately with lots of water and continue rinsing for 15 minutes.

See a health worker if your eyes burn or you have trouble seeing after the eye wash.

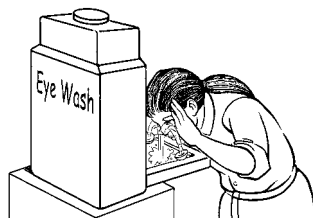


For chemicals breathed in:

If you feel dizzy or nauseous, or have a lot of trouble breathing, go to a health worker right away.

If a worker becomes very ill or passes out while using a chemical, take the person to a health worker immediately.

WHEN YOU SEE A HEALTH WORKER ABOUT A CHEMICAL ILLNESS OR INJURY

If you go to a health worker about a health problem caused by chemicals, try to bring information about the chemical with you. Most doctors and health workers do not know much about the health effects of chemicals. If you can, bring the label from the chemical container, or write down the name of the chemical or the product. Describe what the chemical looks like, how it smells, and what it is used for. Explain why you think the chemical is causing your illness or injury.

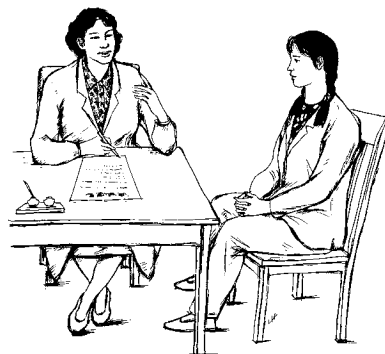

How to clean up a small chemical spill


A chemical spill can happen anywhere chemicals are stored and used. The harm caused by a spill can be reduced when workers are trained to safely clean up small spills, and to evacuate the area if a spill is too dangerous. The boss is responsible for making sure chemicals are stored and used safely, and for making sure all workers know what to do when a spill happens.

If there is someone more prepared than you to clean up a spill—for example, a person who has been trained to do this work—call that person first.

Always wear protective clothing, including rubber boots and gloves, to clean up a chemical spill.


CONTROL THE SPILL

The most important thing is to keep the spill from getting bigger. First, look for the cause of the spill and try to stop it. If the spill is caused by leaking equipment, shut down that machine. If a container has tipped over, turn it right side up. If a container is leaking, put it inside another container with no holes in it.

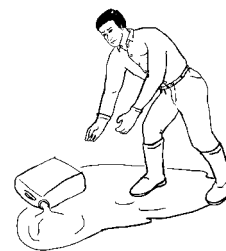

CONTAIN THE SPILL

Absorb the chemical by putting soil, sand, sawdust, clay, or similar material on the spill. If the material may blow away, moisten it with a little water, or cover it with a plastic cloth, or tarp.

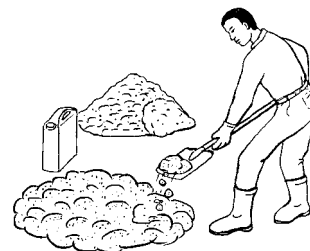

CLEAN UP THE SPILL

Scoop the materials into metal drums or thick plastic containers. Be sure to label the container. Do not try to wash the chemical away with water. This will spread the chemical and make the problem worse. The boss is responsible for making sure chemical waste is disposed of properly. For more information see 'Handling chemical waste' on page xx.



WHAT TO DO IF A BIG CHEMICAL SPILL HAPPENS

- First, get away from the danger.
- Tell other workers to leave the area.
- Alert someone who is trained and equipped to stop the spill and clean it up.

Wash hands before eating, drinking, or smoking

Even if you wear gloves, you can get some chemical on your hands when you take the gloves off, or if the gloves leak. When a chemical gets on your hands, that chemical can also get on anything you touch.

Washing your hands before you touch food, dishes, or cigarettes helps prevent swallowing a dangerous chemical. This is especially important for workers exposed to lead, asbestos, pigments, solder paste, and toxic dust from grinding, foundries, and metal casting.

For more information about making sure workers can wash their hands as often as necessary, see ‘Water and Toilets,’ on pages 142 to 145.

Wash off chemicals with plain soap and water.



Healthy skin protects your body

Healthy skin helps protect the body from germs that cause illness. When your skin is cracked or bleeding, germs and chemicals can get into your body more easily.

You can help protect your skin by washing only with ordinary soap and water. Strong soaps and chemicals for removing grease, paint, or glue can irritate or damage your skin. Chemicals in these cleaners can also get inside your body through the skin and harm your health in other ways.

Rubbing oil or lotion into skin after washing helps prevent skin from getting dry or cracked.



Smoking adds danger to factory work

Smoking cigarettes in the workplace adds dangerous chemicals to the air all workers breathe, whether they smoke or not.

CIGARETTE SMOKE IS DANGEROUS

Cigarette and cigar smoke contains dangerous chemicals from the burning tobacco and chemicals mixed with the tobacco. The smoke has small particles that irritate the eyes and throat. When these particles are breathed in, they carry chemicals deep into the lungs, causing lung cancer, emphysema, asthma, and other diseases that can make you very ill. Many people die from smoking every year.



CHEMICALS FROM WORK GET ONTO CIGARETTES

If you have a chemical on your hands and you touch a cigarette, the chemical can get on the cigarette. When you put cigarette with chemical on it in your mouth, you can swallow some of the chemical. When you smoke a cigarette with a chemical on it, the chemical burns and you can breathe it in.

SMOKING MAKES LUNGS AND HEART WEAKER

Because smoking hurts your lungs and heart, your body is less able to resist harm done by workplace chemicals, such as plastic fume, solvents, diesel exhaust, and asbestos.

SMOKING IS MORE DANGEROUS IF YOU ALSO BREATHE CHEMICALS

Some chemicals used in factories are more dangerous for workers who also smoke. For example, an asbestos worker who smokes is 10 times more likely to get lung cancer than a non-smoking asbestos worker.



What do you think?

Is smoking an important health problem among workers in your factory?

Is there a policy about smoking in your factory? Do you agree with it? Why or why not?

Protecting workers' families

If you leave the factory with chemical dust, spills, or splashes on your clothes, skin, or hair, other people can be harmed by touching or breathing these chemicals. Using safer chemicals is the best way to protect workers and their families. But if dangerous chemicals are used in your factory, **you can protect your family by changing clothes and washing your skin and hair before going home.**



At home, wash work clothes separately to prevent getting chemicals on other family clothes.

If you work around chemicals and dangerous dust, your boss should provide a clean place to change clothes and store clean clothes during the work day, and a place to shower with soap and warm water before going home. The boss should also launder your work clothes daily to remove dangerous chemicals and dust.

If you use a chemical to clean stains from your clothes, follow the same precautions for using chemicals at work. Take off the stained clothes, wear gloves, work in a well ventilated area or outdoors, use a very small amount of the chemical, and wash the clothes well with soap and water before you wear them again.

Handling chemical waste

Many factories dump chemical containers and other waste directly into sewers, water sources, and local garbage dumps. This is very dangerous for the community and sometimes for the region that uses the water downstream from the factory. For more information about the dangers of pollution from factories and ways to organize for safer waste disposal, see 'Pollution from factories' on pages xx to xx.

If you handle chemical waste, use protective clothing and a mask to prevent breathing in chemical dust or vapors, or getting chemicals on your skin and clothes.


EMPTY CHEMICAL CONTAINERS ARE DANGEROUS

Empty chemical containers should not be reused, taken home, dumped in an open area, or piled outside the factory.

Washing empty chemical containers does NOT make them safe to use. A container that looks clean can still have enough chemical in it to cause harm. Chemical containers should never be used to hold food, drinks, or water.



Clean containers for community water — Mexico

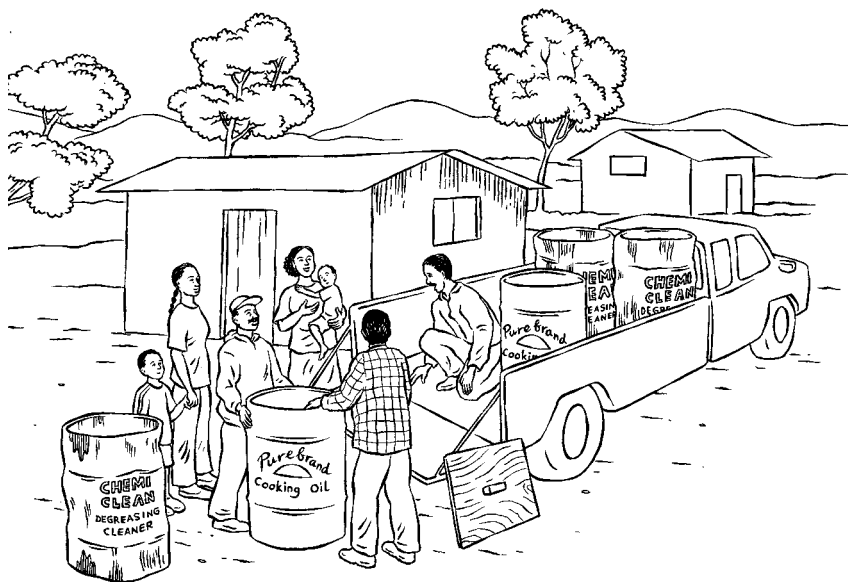

In our community, at least 1 person in every family works in 1 of the export factories down the road. There is plenty of water in all the factories, but we do not have running water or electricity in our homes. We have to carry water from a common tap and store it at home in big barrels.

A lot of people in the community used to have skin rashes and stomach problems. Some of us thought these problems were caused by something in the water. In our mothers' group, we decided to survey families to learn more about health in the community. We found out that everyone used the same water, but we used different kinds of barrels to store the water.

We asked more questions and learned that most of the families with the same health problems stored their water in empty barrels from a pile outside one factory. We did not know what the barrels had contained, because the labels were written in a language we cannot read. We asked some workers in that factory to find out what was in the barrels before they were thrown out. They told us that the barrels had contained dangerous chemicals.

The mothers' group decided to find safer water containers for all the families. We went to a local food factory and asked the boss to give us empty barrels that had contained cooking oil. He was glad we could use his empty barrels, and he makes sure they are washed clean for us. We are now delivering clean barrels with lids to each home, and we take the old chemical barrels away to the dump.

